



URMA

High Chrome Steel

Chemical composition

| | C | Si | Mn | Mo | Cr | Ni | W, V, Nb |
|-------------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------|--------------------------|--------------------------|
| URMA | <u>1.0</u> <u>2.0</u> | <u>0.7</u> <u>0.8</u> | <u>0.5</u> <u>1.5</u> | <u>0.2</u> <u>0.8</u> | <u>10.0</u> <u>14.0</u> | <u>0.5</u> <u>1.5</u> | <u>0.2</u> <u>0.6</u> |
| ICRA | <u>3.0</u> <u>4.0</u> | <u>0.5</u> <u>1.5</u> | <u>0.5</u> <u>1.6</u> | <u>0.2</u> <u>0.8</u> | <u>1.0</u> <u>2.0</u> | <u>3.0</u> <u>4.0</u> | <0.5 |
| MICRA | <u>3.0</u> <u>4.0</u> | <u>0.5</u> <u>1.5</u> | <u>0.5</u> <u>1.6</u> | <u>0.2</u> <u>0.8</u> | <u>1.0</u> <u>2.0</u> | <u>3.0</u> <u>4.0</u> | 1-4 |
| CRONA | <u>2.3</u> <u>3.0</u> | <u>0.6</u> <u>1.0</u> | <u>0.8</u> <u>1.2</u> | <u>1.0</u> <u>1.5</u> | <u>15.0</u> <u>20.0</u> | <u>1.0</u> <u>1.5</u> | <u>0.2</u> <u>0.6</u> |
| CICRA | <u>2.2</u> <u>2.9</u> | <u>0.7</u> <u>0.8</u> | <u>1.0</u> <u>1.2</u> | <u>1.0</u> <u>1.5</u> | <u>15.0</u> <u>20.0</u> | <u>1.0</u> <u>1.5</u> | 1-2 |

Properties

| | | |
|-------------------------------|----------------------|-----------------|
| Hardness | Ld (ShC) | 735-780 (70-80) |
| Tensile strength | (MPa) | 850 |
| Thermal conductivity | (W/m x K) | 16 |
| Thermal exp. coeff. (20-100C) | (1/Kx10-6) | 10 |
| Young's modulus | (GPa) | 220 |
| Poisson's ratio | - | 0,28 |
| Density | (kg/m ³) | 7600 |
| Specific heat | (J/kg x K) | 490 |

Comparative properties

| | Wear resistance | Fire crack resistance | Toughness | Product surface |
|-------------|-----------------|-----------------------|-----------|-----------------|
| URMA | — | — | — | — |
| ICRA | — | — | — | — |
| MICRA | — | — | — | — |
| CRONA | — | — | — | — |
| CICRA | — | — | — | — |

Description

Double poured high chrome steel produced by the vertical spin casting process.

The microstructure consists of a tempered bainitic/martensitic matrix with Cr₇C₃-carbides.

The roll is heat treated at high temperatures to obtain optimum material properties, favourable stress levels and homogeneous hardness.


CORE MATERIAL

Nodular iron (SG).

(Properties displayed in a separate product data sheet.)

Applications

Work roll for the roughing stand of double stand plate mills.

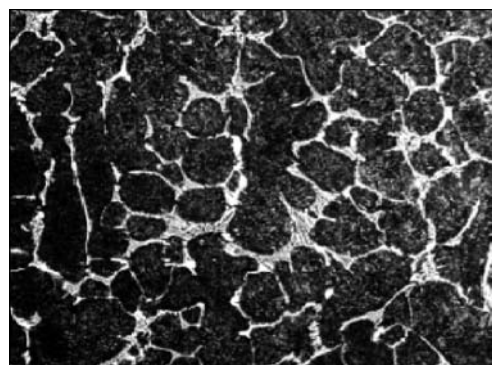

Microstructure URMA.

Features & Benefits

- Excellent fire crack resistance and very good oxidation behaviour at high temperatures.
- Very good wear resistance in combination with good operation safety.
- Constant material properties throughout the usable shell.